

## Barrier-Blok™

EBBB-0100

### DESCRIPTION

Barrier-Blok™ is a molded rubber product with many uses. It has a unique bullnosed interlocking design that allows each blok to be fitted to each other. Barrier-Blok™ is approved and used by many federal, state and local agencies.

### SPECIFICATIONS

▪ Dimensions	24" x 12" x 4"
▪ Weight	30 lbs. – 15 lbs. per sq ft (80 pieces to a palette / 2450 lbs)
▪ Composition	recycled rubber & polyurethane binder
▪ Color	black
▪ Holes	two - 1.375" diameter; aligned for staking one course to the next
▪ Permeability	none, solid
▪ Freeze-Thaw (ASTM C1026)	product exposed to 15 cycles of freeze-thaw at 0 Degrees for 90 days. No change.
▪ UV Resistance	no change after 48 months exposure
▪ Flammability (ASTM D1929-96)	lit cigarettes, cigars or matches will burn until they self-extinguish. Ignition at minimum 9 minutes sustained exposure to 722 degrees Fahrenheit.
▪ Chemical leaching	five year testing indicates no evidence of increased levels of aluminum (Al), zinc (Zn), chloride (Cl) or sulfate (SO) Barium (Ba), cadmium (Cd), chromium (Cr), lead (Pb), and selenium (Se) in surrounding water supplies.

### APPLICATIONS


- Containment of solid, semi-solid and liquid materials
- Weighting and hold down for signs, tarps and barriers; ballast.
- Erosion control, energy diversion, catch basin formation, runoff control
- Drain inlet protection, oil well / pump protection
- Creation of temporary retaining walls and washout areas
- Base for fence and stand poles

### FEATURES

- Durable – will not breakdown in outside elements; will withstand occasional vehicle impact
- Consistent size – one Eco-Blok™ replaces two typical sand / gravel bags
- Environmentally friendly – made from recycled tires – check local regulations for grant funding eligibility
- Easy to store, install and maintain
- Can be stacked, staked or glued in place

### OPTIONS

- Color, logos, marking and reflectors are available for additional charge. Please inquire with your needs.

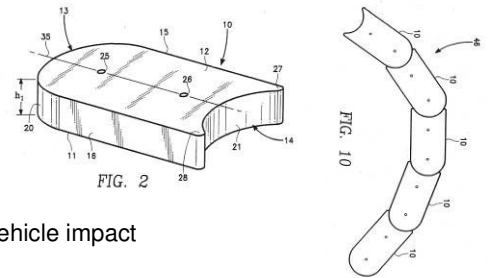

Eco-Blok, LLC  
 1560-1 Newbury Road  
 Suite 102  
 Newbury Park, CA 91320  
 United States  
 Phone: (877) 600-4995  
 Fax: (805) 499-5797  
[www.eco-blok.com](http://www.eco-blok.com)